

Longo & Co



DW132TC

SOFT SERVE FREEZER

2+1 mixed Flavors, Countertop, Digital Control
P: Pump Feed Model

Powerful and Versatile

Two flavor medium capacity countertop model for ice cream, frozen yogurt and much more

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Hopper Agitator

Maintain product consistency and prevent product separation

Soft System Start

Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

Self-closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control

Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

Ideal for medium capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.





Longo & Co

Address: Towerworks Birkhouse Lane Paddock Huddersfield HD1 4SF
Phone: 00441484666484 Email: Info@mrwhippy.biz

DW132TC

SOFT SERVE FREEZER

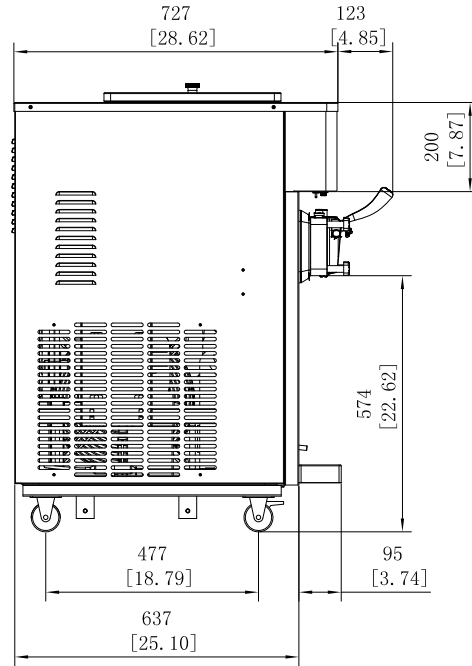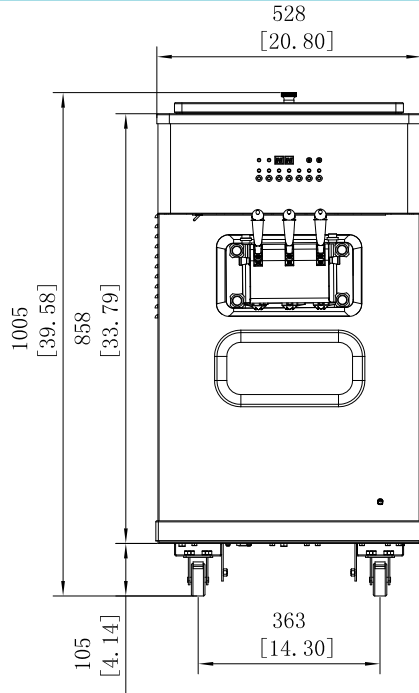

SPECIFICATIONS

Flavors	2+Twist
Freezing Cylinders	2X2L/2.1 qt
Mix Hoppers	2X12L
Output Capacity (80 grams)	380serves/hr
Clearance Requirements	152mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	150/331	151/333
Shipping	184/406	185/408
Volume	0.73CBM/25.78CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	528/20.8	670/26.4
Depth	727/28.6	870/34.3
Height	1005/39.6	1255/49.4

Electrical	MFS	MCA	Power(kW)
220-240/50/1	20	14	2.6
208-230/60/1	20	16	2.8

FEATURES

Control Systems	Single, Digital
Refrigerated Hoppers	<input checked="" type="checkbox"/>
Hopper Agitators	<input checked="" type="checkbox"/>
Temperature Displays	<input checked="" type="checkbox"/>
Standby Mode	<input checked="" type="checkbox"/>
Auto Closing Dispensing Valves	<input checked="" type="checkbox"/>
Dispensing Speed Control	<input checked="" type="checkbox"/>
Low Mix Indicator Light & Alarm	<input checked="" type="checkbox"/>
Low Temperature Protection	<input checked="" type="checkbox"/>
Motor Overload Protection	<input checked="" type="checkbox"/>
High Pressure Protection	<input checked="" type="checkbox"/>
Quick Freeze	<input checked="" type="checkbox"/>
Soft Start	<input checked="" type="checkbox"/>
Direct Drive Pump (Ponly)	<input checked="" type="checkbox"/>

AVAILABLE OPTIONS

Water Cooled	<input checked="" type="checkbox"/>
Top Air Discharge Chute	<input checked="" type="checkbox"/>

•Above specifications are subject to change without notice

Longo &Co

Address: Towerworks Birkhouse Lane Paddock Huddersfield HD1 4SF
 Phone: 00441484666484 Email: Info@mrwhippy.biz