

# Arctic 265 DC Floor-standing

## **SOFT SERVE FREEZER**

2+1mixed Flavors, Floor, Digital Control



### Powerful and Versatile

Two flavor medium capacity floor model for ice cream, frozen yogurt and much more

#### **Fast Freeze Down**

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

#### **Digital Control and Display**

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

#### **Auto Programming**

Allows automatic switching of operation modes based on preset schedules

#### Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

#### **Hopper Agitator**

Maintain product consistency and prevent product separation

Ideal for medium capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.

#### **Soft System Start**

Slow motor start reduces equipment noise and stress on drive train

#### **Direct Drive Transmission**

Eliminates consumable moving parts and increases transmission efficiency

#### **Safety Protections**

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

#### **Quick Freeze**

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

#### Self-closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control








### Longo &Co

Address: Towerworks Birkhouse Lane Paddock Huddersfield HD1 4SF Phone: 00441484666484 Email: Info@mrwhippy.biz

# Arctic 265 DC Floor-standing

## **SOFT SERVE FREEZER**

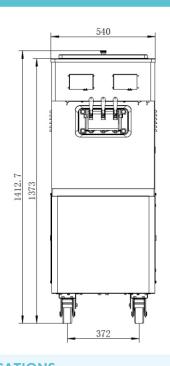


SPECIFICATIONS	
Flavors	2+Twist
Freezing Cylinders	2X2L/2.1qt
Mix Hoppers	2X12L
Output Capacity (80 grams)	380serves/hr
Clearance Requirements	152mm/6"on back

Weight	Kg/lb (Gravity)	
Net	221/487	
Shipping	262/578	
Volume	0.97CBM/34.25CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	540/21.3	666/26.3
Depth	806/31.7	866/34.1
Height	1413/55.6	1680/66.2

Electrical	Power (kW)	Total Amps (A)	Fuse (A)
220-240/50/1	4.4	20	25
208-230/60/1	4.6	22	25

<sup>•</sup>Above specifications are subject to change without notice

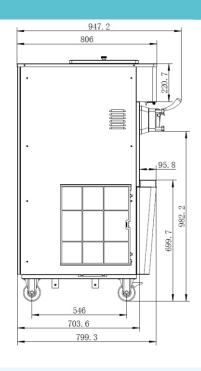

FEATURES	
Control Systems	Sinqle,Digital
Refrigerated Hoppers	
Hopper Agitators	
Temperature Displays	
Standby Mode	<b>~</b>
Auto Closing Dispensing Valves	
Dispensing Speed Control	$\checkmark$
Low Mix Indicator Light & Alarm	
Low Temperature Protection	$\checkmark$
Motor Overload Protection	$\checkmark$
High Pressure Protection	
Quick Freeze	
Soft Start	
Direct Drive Pump (Ponly)	

AVAILABLE OPTIONS	
Water Cooled	
Top Air Discharge Chute	

## Longo &Co